

FINGERTEC



AUTOMATIC APPEND DATA

TO OUTPUT FILE DURING DATA DOWNLOAD
SUGGESTIONS & SOLUTIONS FOR TCMS V2

The clocking data can be exported as an ASCII file manually or automatically. Automatic export is a better choice because user need not have to perform the task periodically. Please follow the steps shown below to perform automatic export of raw clocking data and, make sure that TCMS V2 is always ON so it can download the data from the reader automatically.

Step 1 • Configuring Automatic Download Interval.

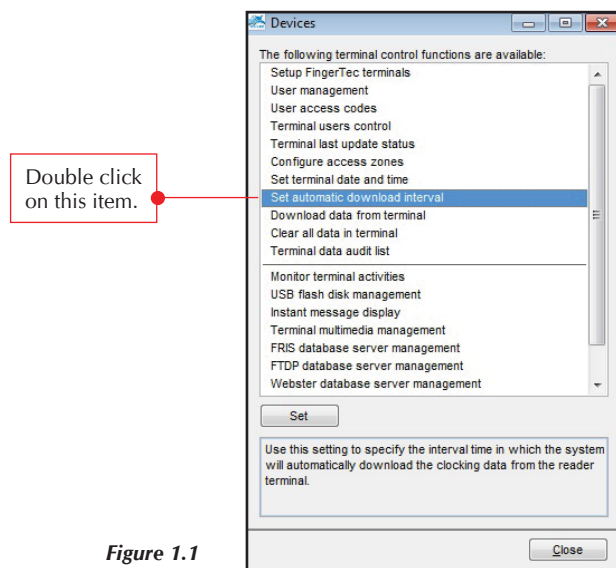


Figure 1.1

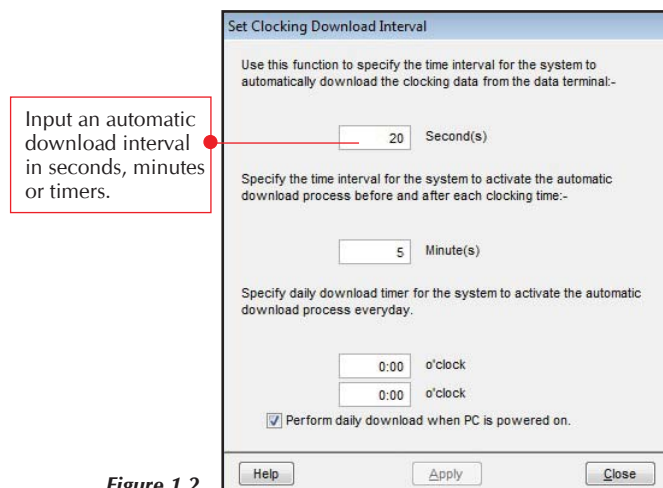


Figure 1.2

Step 2 • Adjusting the format of exported clocking data.

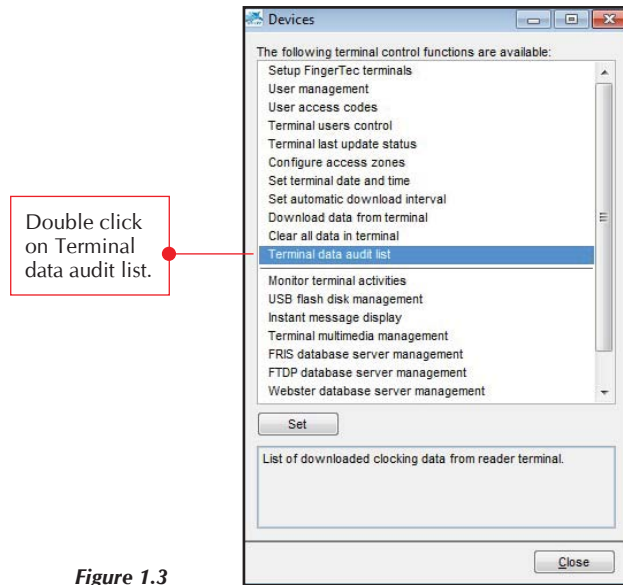


Figure 1.3

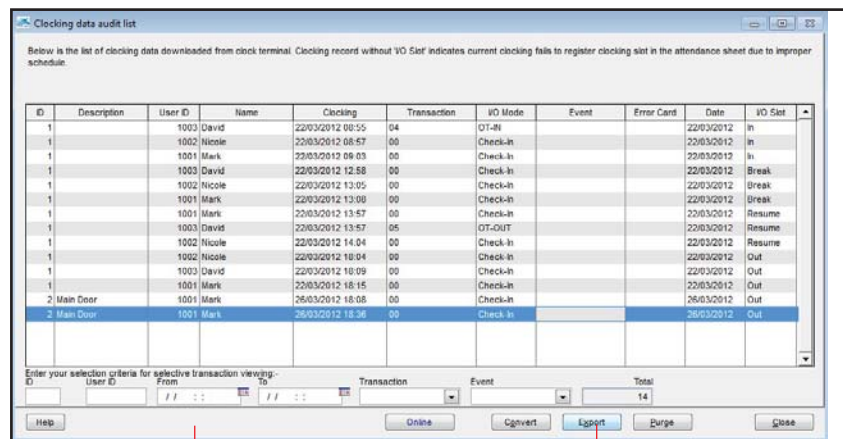


Figure 1.4

Double click at the number 0 to pause the process.

Click the Export button to configure the details of the data to be output.

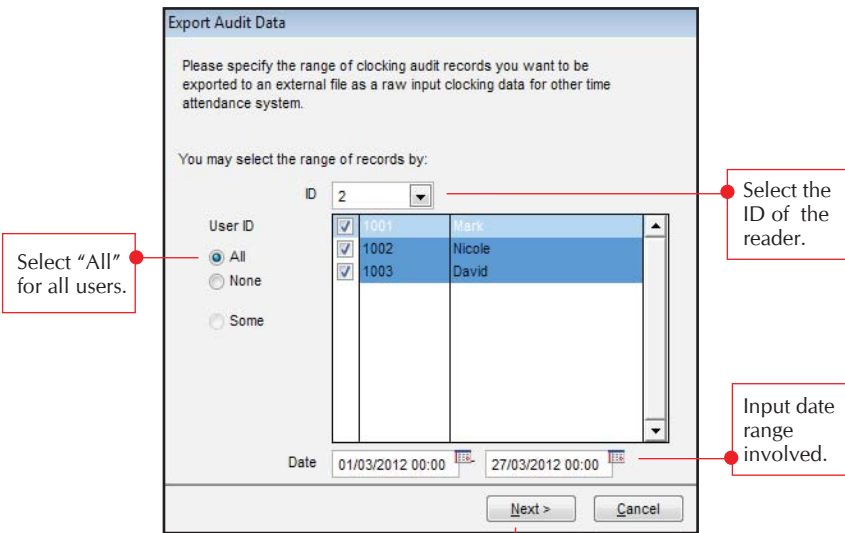


Figure 1.5

Click Next to proceed.

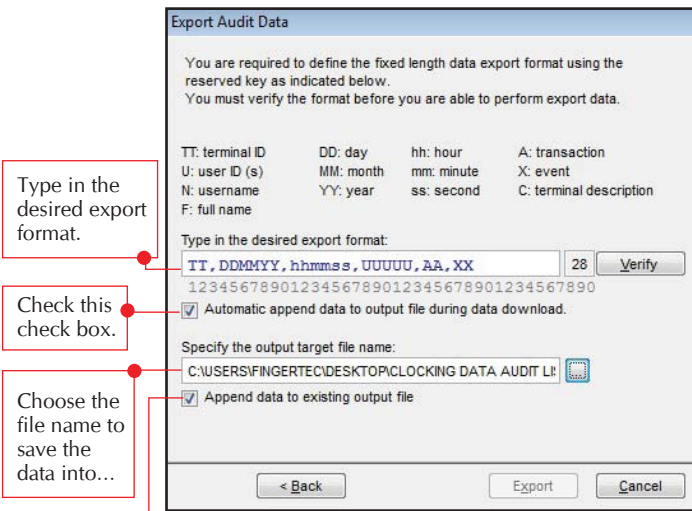


Figure 1.6

Check this check box.

Step 3 • Exporting Clocking Data to Output File.

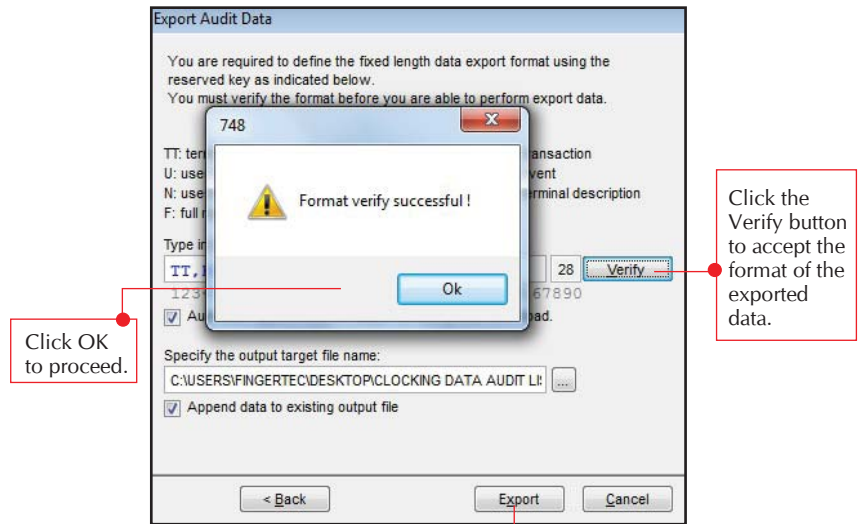


Figure 1.7

Click the Export button to start exporting.

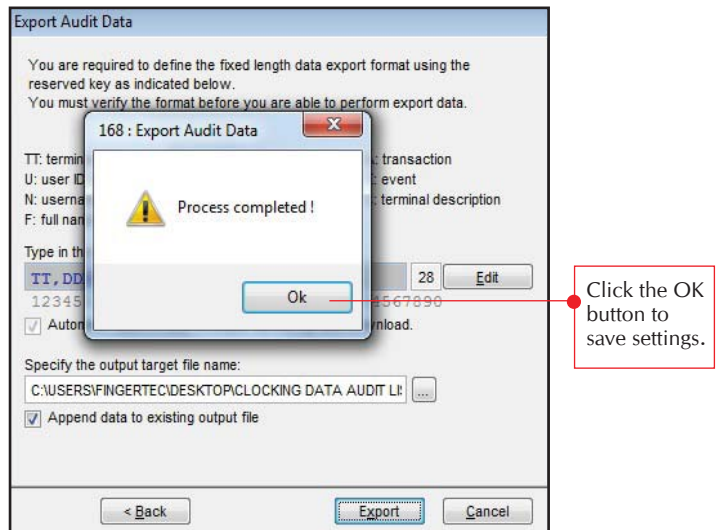


Figure 1.8

Step 4 • Viewing the exported data.


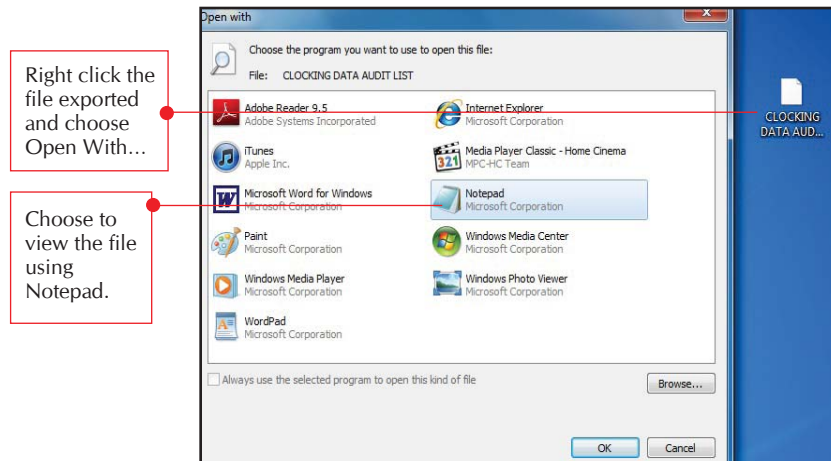


Figure 1.9

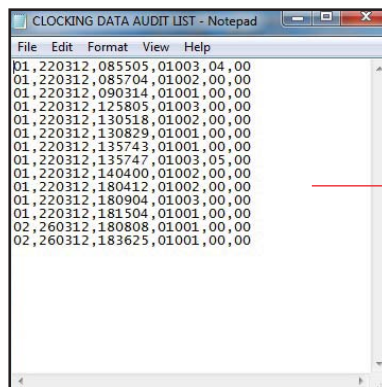

All clocking data, which downloaded to TCMS V2, will automatically be exported.

Figure 1.10